



Installation Instructions

Model:	Honda Talon
Description:	Radio Install
Part Number:	MBQT-RAD-1
Assembly Time:	60 Min (1-Hours)

Before you begin, read through these instructions and check that all parts are present. Always disconnect negative battery terminal, prior to installation. Please note that MB Quart cannot assume any responsibility for damage resulting from incorrect installation.

Parts List		
No.	Component Name	Qty
1	GMR-LED with Housing (MBQT-RAD-1)	1

Tools Required	
1	Bojo Tool
2	Panel Clip Pliers
3	10mm open box wrench
4	10mm and 12mm socket
5	½" socket
6	Ratchet
7	Small flat head screwdriver
8	Phillips screwdriver
9	3mm and 5mm Allen Wrench
10	¼" and ½" drill bit or stepper bit
11	1" hole saw
12	Drill
13	Rotary tool similar to a Dremel
14	Heat Gun or Lighter
15	Crimper

Disassembly


- Remove hood by turning two latches



- Remove four 10mm bolts, four push pins, and five 5mm allen bolts to remove top of dash



- Remove half mud guard with six push pins

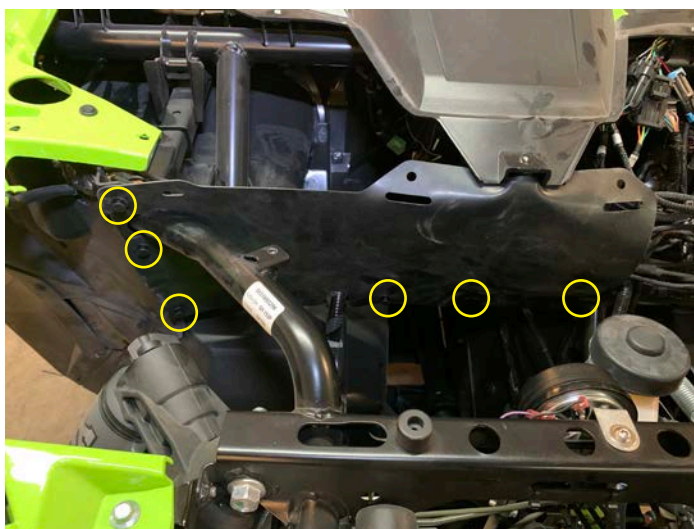

Radio & Dash Kit Installation

- Place the metal u-bracket at the top of the pocket and mark the bottom portion to be cut out with a rotary tool



- Drill two 1/4" holes using the u-bracket as a guide in the back of the pocket



- Install two 5mm allen bolts through the bracket and pocket and install a flat washer and lock nut (you may need to ask a friend for help or can reach on both sides of the dash to tighten)



Radio & Dash Kit Installation

- Slide the dash panel with the bevel and MB Quart logo facing outward like the image



- Pass the wires from the radio through the hole below the u-bracket in the pocket



- Install four M4 cap head bolts through the face of the radio and dash into the u-bracket and tighten




Radio & Dash Kit Installation

- Install covers on each side of radio



Reassembly

- Install half mud guard with six push pins

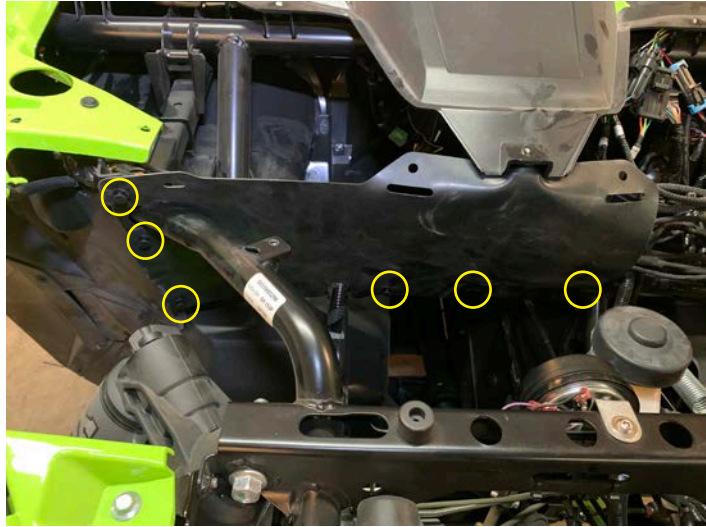

- Install four 10mm bolts, four push pins, and five 5mm allen bolts to remove top of dash



- Install hood by turning two latches





FCC Notice

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a mobile installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complied with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

WARRANTY

Maxxsonics USA Inc. warrants this product, to the original consumer purchaser, to be free from defects in material and workmanship for a period of one (1) year from the date of purchase. Maxxsonics USA Inc. will, at its discretion, repair or replace defective products during the warranty period. Components that prove to be defective in materials and workmanship under proper installation and use must be returned to the original authorized Maxxsonics USA Inc. retailer from where it was purchased. A photocopy of the original receipt must accompany the product being returned. The costs associated with removal, re-installation and freight are not the responsibility of Maxxsonics USA Inc. This warranty is limited to defective parts and specifically excludes any incidental or consequential damages connected therewith. To view the full warranty, please visit the website.

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use such marks by MB Quart is under license.

All product names, logos, and brands are property of their respective owners. All company, product and service names used in this literature are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

©2021 Maxxsonics USA, Inc.

MBQuart products are designed and engineered in the USA by

